
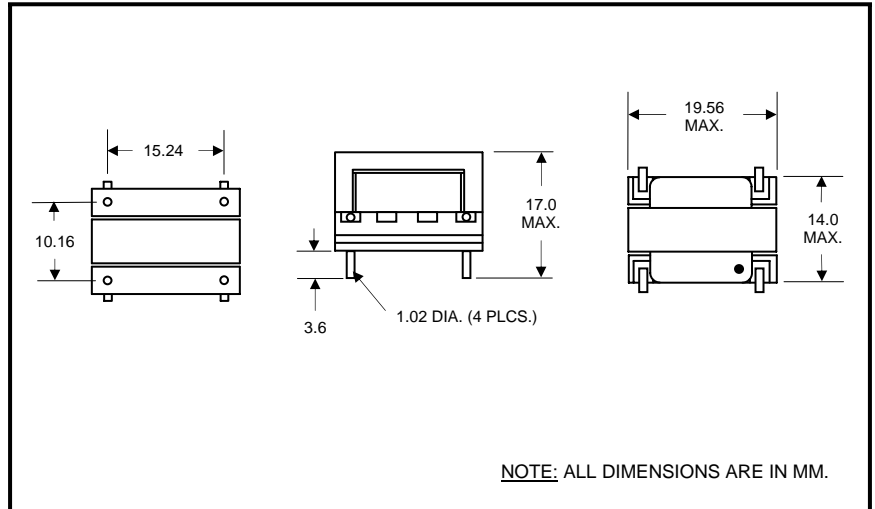


# Special Products

# Audio Transformer

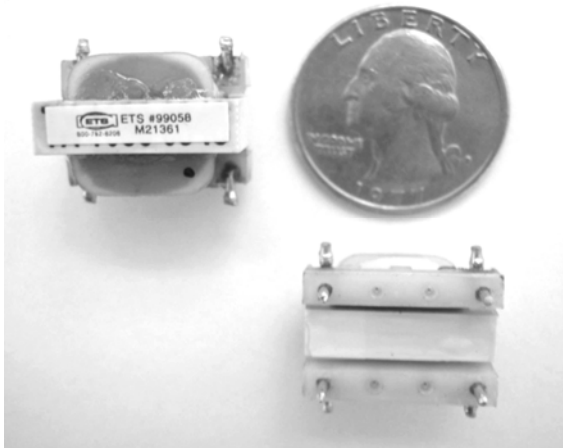

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Full audio bandwidth</li> <li>• Minimizes spurious signal ingress</li> </ul>	<p>The <b>ETS Audio Transformer</b> is ideal for use in applications sending line-level audio signals. Signals may be sent in either direction.</p> <p>By balancing the audio signal as well as isolating, signals can be easily sent over 100 meters.</p>	<ul style="list-style-type: none"> <li>• Home Theater Systems</li> <li>• Auditoriums</li> <li>• Churches</li> <li>• Schools - Classrooms</li> </ul>

Specifications		Product Ordering Information	
Bandwidth	10 Hz to 20 kHz	99058	Audio Transformer
Impedance	600 ohm		
Longitudinal Balance	60dB Min. from 200 Hz to 1 KHz		
	40dB Min. from 1 KHz to 4 KHz		
Return Loss	15dB Min. from 300 Hz to 3 KHz		
Isolation	500 V		
Net Weight	0.01 kg		

© Copyright 2004-2009 Energy Transformation Systems  
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Precision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.  
 Revised 09/10/2004



**Energy Transformation Systems, Inc.**  
 43353B Osgood Road, Fremont, CA 94539  
[www.etslan.com](http://www.etslan.com)  
 800-752-8208 510-656-2012 Fax 510-656-2026

