


# InstaSnake PA200 Series



# Audio Products - Adapters

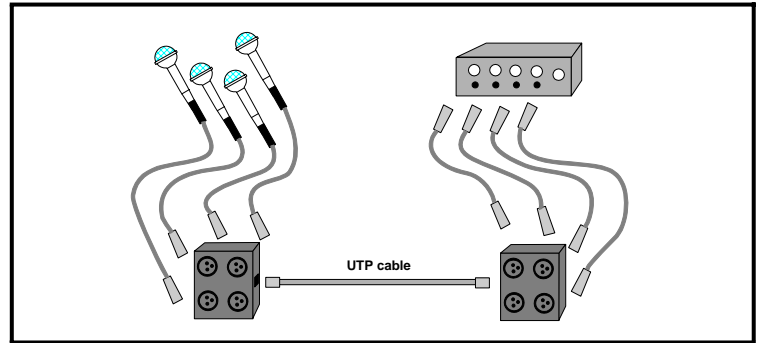

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Very easy transport</li> <li>• Low cost</li> <li>• No ground loops</li> <li>• Add second unit to increase the number of channels</li> <li>• May be used for analog or digital audio</li> <li>• Supports 48V phantom power</li> <li>• Rugged, 'road-ready' construction</li> <li>• RoHS compliant</li> <li>• USA Made</li> <li>• 100% tested</li> </ul>	<p>The <b>ETS InstaSnake Series (PA200)</b> is a compact, lightweight, versatile passive group of components allowing you to run audio signals over a single run of CAT5, 5E or 6 cables. With a roll of wire, these compact units are easily transported and/or stored solving dozens of live and/or recording sound problems.</p> <p>The <b>InstaSnake</b> is a passive unit, so you do not need power. The <b>InstaSnake</b> accepts 'mic 'level, line level, analog or digital audio and supports phantom power.</p> <p>The basic units are a pair of passive units with bi-directional capability which can be input directly into analog or digital consoles. Designed to the highest professional standards the <b>InstaSnake</b> has a wide, flat frequency response, low THD and residual noise. The <b>InstaSnake</b> has been factory tested to 1900 feet over CAT5 using low Z dynamic microphones. Phantom power has been tested to 850 feet over shielded cable. PA205 will send phantom power over standard Cat5 or 6 cables.</p> <p>The <b>InstaSnake</b> is available in 2 basic send/receive units which can be mounted in a 2u 19" rack, plus units with pigtails, wall plate versions. The <b>PA202P</b> with (4) 18" pigtails lets you access the mixer without the need for an additional 4 microphone cables.</p>	<ul style="list-style-type: none"> <li>• Live Sound</li> <li>• Recording Studios</li> <li>• TV &amp; Radio Broadcasts</li> <li>• Production/Post Production Houses</li> <li>• Foley/ADR Studios</li> <li>• Hotels</li> <li>• Convention Centers</li> <li>• Churches</li> <li>• Cruise Ships</li> <li>• Auditoriums/Stadiums</li> <li>• Home Studios</li> <li>• Remote &amp; News Trucks</li> <li>• Field Recording</li> </ul>

Specifications		Product Ordering Information	
Crosstalk @ 20KHz	-109 dB between Ch1 and Ch2 -102 dB between Ch1 and Ch3 -106 dB between Ch1 and Ch4 -106 dB between Ch2 and Ch3 -106 dB between Ch2 and Ch4 -109 dB between Ch3 and Ch4 -109 dB between Ch3 and Ch4	PA202F PA202M PA202P PA202FP PA203F PA203M PA203P PA205F PA205M PA202FWP/ PA202MWP 22518 CJ5ES	(4) FXLR to RJ45 jack, all pins (4) MXLR to RJ45 jack, all pins (4) MXLR 1.50' pigtail to RJ45 jack, all pins (4)FXLR 1.50' pigtail to RJ45 jack, all pins (3) FXLR + (1) MXLR to RJ45 jack, all pins (3) MXLR + (1) FXLR to RJ45 jack, all pins (3) MXLR + (1) FXLR 1.50' pigtail to RJ45 jack (3) FXLR to RJ45 jack, all pins (3) MXLR to RJ45 jack, all pins 2 gang brushed steel wall plate, (4) FXLR or MXLR to 110 punchdown 2u, 19" Rack Mount Panel w 3 blank plates, holds up to 4 InstaSnakes Cat5e Inline coupler, shielded RJ45 jack
Distance	UTP – 1900 ft; Shielded UTP 850 ft		
Connectors	Female or Male XLR to Ethercon RJ45 jack or 110 punchdown (wall plate)		
Dimensions L x W x H	69mm x 62mm (+pigtail) x 36 -PA202P/PA203P 107mm x 70mm x 45mm 117mm x 115mm x 37mm (wall plate)		

Revised 07/07/09



<http://www.etslan.com>

**Energy Transformation Systems, Inc.**  
 43353 Osgood Rd. Unit B, Fremont, CA 94539  
 Toll Free 800-752-8208 Fax 510-656-2026