


# AV600 Series

# Baseband Video + Audio Distribution

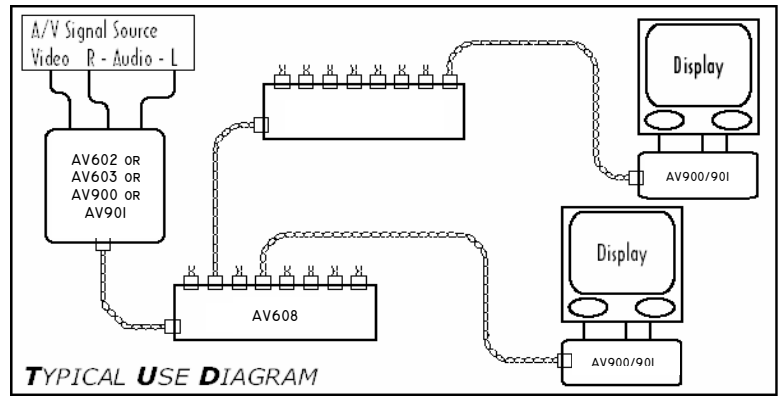

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>Run video and stereo audio signals over Cat5 wiring</li> <li>Up to 512 outputs possible from a single source</li> <li>For efficiency, the system balances the input signal, distributes on UTP, and converts back at each display</li> <li>Complete system design flexibility, with components that can be 100's of feet apart</li> <li>Low power requirements for the Hubs, display baluns need no external power</li> <li>Made in USA 100% tested</li> </ul>	<p>The <b>ETS CAT5 A/V Broadcast System</b> is a <b>UTP Audio/Video Distribution Hub</b>. It has baseband video with two channels of line-level audio transmit through the distribution amplifier, creating <b>8 out-put sets</b> (video + stereo audio) from a single source. The powered <b>AV608</b> can be cascaded twice (three tiers) yielding a total distribution of <b>512 displays</b> from a just one input source.</p> <p>NTSC, PAL, SECAM or CCTV signals are converted to and from UTP using standard <b>ETS AV900 or AV901 Baseband Audio/Video Baluns</b>. Alternatively, the <b>AV602 or 603 Isolated Video/Audio Source Balun</b> may be used between the signal source and the first <b>AV608</b>. The <b>AV602 or 603</b> provides full isolation of the video signal, preventing the visual artifacts that can be caused by ground loops.</p> <p>The <b>AV600 System</b> supports color video and stereo audio over a total run length in excess of 330 meters (inclusive of all cable segments) on Category 5 or better cable. Black and white signals will typically be supported up to 750 meters.</p>	<ul style="list-style-type: none"> <li>Point of Sale and In-store Advertising</li> <li>Information and Entertainment Distribution</li> </ul>

Specifications		Product Ordering Information	
Bandwidth	Flat to 60 MHz (video) / 10Hz to 20kHz (audio)	AV602	Isolated Video/Audio Source, (1) FBNC + (2) RCA
Connectors	BNC or RCA (video) / (2) RCA (audio) to RJ45 (pairs 2, 3 & 4 - Cat5)	AV603	Isolated Video/Audio Source,(3) RCA Jack to RJ45
Crosstalk	>50dB (video)	AV608	UTP Audio/Video Distribution Hub, 8 Channel
Impedance	600:600 (audio)		
Isolation	Audio: 500 V (per channel)		
Power In	9-12 VAC, 800mA min. with supplied Adapter.		
Distance	Up to 1000 ft		
Dimensions	AV608: 260 x 165 x 32 mm (10.3 x 6.5 x 1.3 in)		
Net Weight	AV602/603: 140 x 85 x 40 mm (5.5 x 3.4 x 1.6 in)		
	AV608: 1.5 kg (3.4#) AV602/603: 0.2 kg (0.4#)		

© Copyright 2006 - 2009 Energy Transformation Systems, Inc.  
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Precision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify, products or services of their respective owners. Revised 07/08/09



**Energy Transformation Systems, Inc.**  
 43353 B Osgood Road, Fremont, CA 94539  
 www.etslan.com  
 800-752-8208 510-656-2012 Fax 510-656-2026

