


# AV920WP Series



# Component Video + Digital Audio Wall Plate

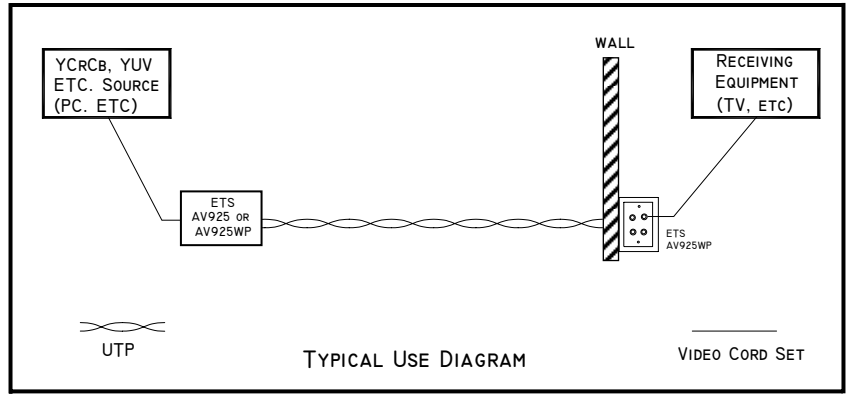

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Decorator wall plates for a sleeker, cleaner professional installation</li> <li>• Easy installation with punch down blocks</li> <li>• Ports are pre-labeled and easily identified</li> <li>• Send Component Video + Digital Audio signals on UTP at distances of up to 600 feet (150 feet nominal using CAT3 cable)</li> <li>• Meets FCC Class A</li> <li>• Superior signal balancing, lower crosstalk, less ingress and ghosting</li> <li>• May utilize existing telecom wiring</li> <li>• Made in USA.</li> <li>• 100% tested</li> <li>• Available in White or Ivory</li> </ul>	<p><b>New!</b> The ETS AV925WP Component Video + Digital Audio Wall Plate has been designed with a new flat circuit board and decorator wall plate giving neater, more professional installations by complementing existing wall plates. For ease of use all ports are pre-labeled giving consistent signal labeling for applications utilizing component video signals.</p> <p>Components video formats include RGB, YUV, YIQ and YCrCb. Custom label is available for use with your application as required (YCrCb shown above). Due to custom labeling requirements, additional lead times may apply for these products.</p> <p>YCrCb component video is a recent addition to consumer equipment, found on some DVD players, high-end televisions and home theater equipment. Professional uses include cameras and VTRs based upon any of the above standards. AV925WP allows you to send component video and digital audio signals on the single run Cat5 or better UTP.</p>	<ul style="list-style-type: none"> <li>• DVD/Home Theater</li> <li>• Broadcast Studios</li> <li>• Production and Post-production Facilities</li> <li>• Video Projection Systems</li> <li>• Conference Rooms</li> <li>• Schools</li> </ul>

Specifications		Product Ordering Information
Bandwidth	Flat to 60 MHz, each channel 20 KHz to 60 MHz (Digital Audio)	AV925WP-X Component Video+Digital Audio (4) RCA jacks to 110 punch down
Connectors	RCA jacks to 110 punch down type	
Distance	500 feet	
Media	Category 3 or better Category 5 or better recommended	
Emission	Meets FCC Class A	
Dimensions	79mm x 123mm x 40mm	
Net Weight	0.08 kg	<p><b>NOTE:</b> FOR WHITE, X= WH FOR IVORY, X= IV</p>

© Copyright 2006-2009 Energy Transformation Systems  
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Procision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners. Revised 07/07/2009



**Energy Transformation Systems, Inc.**  
 43353 B Osgood Road, Fremont, CA 94539  
 www.etslan.com  
 800-752-8208 510-656-2012 Fax 510-656-2026