


TP2000

IBM Midrange Passive Hubs

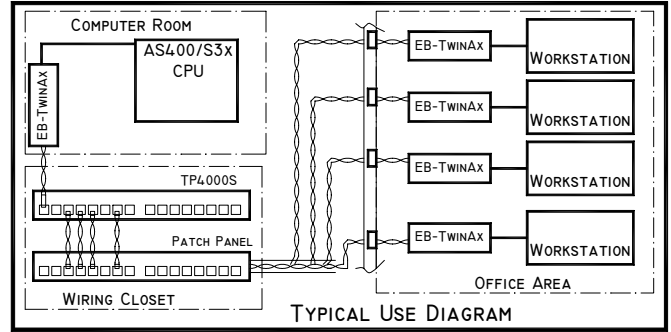

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> Balanced Star™ design achieves best noise suppression Use economical UTP and star configuration Non-active design is transparent to hosts and terminals Wire runs can be up to 2000 feet from the host to any terminal Rack or wall mount Five Year Warranty Made in USA – 100% tested 	<p>The ETS TP2000 Balanced Star™ hub is designed to give system AS400 and S3X networks greater system dependability by delivering clear signals in both directions to IBM® specifications. The TP2000 uses minimum components and no external power source for greater reliability.</p> <p>The TP2000 uses passive balun technology to split the data signal that is totally system transparent. This proprietary impedance matched Balanced Line™ technology achieves outstanding impedance balance, and low noise performance. Balanced Line™ technology rejects the most reflected and induced noise within the network wiring and allows the greatest signal distance of any non-powered hub.</p> <p>The TP2000 comes in sizes to support 2, 4 or 8 host ports and up to 56 workstations within one rack or wall mount enclosure.</p>	<ul style="list-style-type: none"> Provides terminal to mainframe connections in a star topology over unshielded twisted pair (UTP) wire Used in a structured wiring system, the combination of the TP2000 and a patch panel improves wire management and permits easy changes and moves. Star configuration eliminates breaking the daisy chain and interrupting the network during moves and changes.

*NOTE – Results may depend on quality of cable and circuitry inside your monitors. Category 5e or better cable recommended.

Specifications		Product Ordering Information	
Distance	Up to 2000 ft		
Dimensions	1.73H x 9.8W x 3.1D 0.86lb. Net Wt	TP2000-1-11-3	7 ports, RJ11, 1 host, 1 - 19" rack space
	1.73H x 9.8 Wx 3.1D 0.86lb. Net Wt	TP2000-1-45-4	7 ports, RJ45, 1 host, 1 - 19" rack space
	1.73H x 9.8 Wx 2.9D 1.7lb. Net Wt	TP2000-2-11-3	14 ports, RJ11, 2 hosts, 1 - 19" rack space
	1.73H x 9.8 Wx 2.9D 1.7lb. Net Wt	TP2000-2-45-4	14 ports, RJ45, 2 hosts, 1 - 19" rack space
	3.49H x 19W x 2.9D 2.8lb. Net Wt	TP2000-4-11-3	28 ports, RJ11, 4 hosts, 2 - 19" rack spaces
	3.49H x 19W x 2.9D 2.8lb. Net Wt	TP2000-4-45-4	28 ports, RJ45, 4 hosts, 2 - 19" rack spaces
	5.37H x 19W x 2.9D 4.5lb Net Wt	TP2000-8-11-3	56 ports, RJ11, 8 hosts, 3 - 19" rack spaces
	5.37H x 19W x 2.9D 4.5lb Net Wt	TP2000-8-45-4	56 ports, RJ45, 8 hosts, 3 - 19" rack spaces

© Copyright 1999 - 2004 Energy Transformation Systems, Inc. US Patent# 5,097,234, Passive Impedance Matching Device FatCat5 System is patent pending by Energy Transformation Systems. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Precision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify, products or services of their respective owners. Revised 07/09/09



Energy Transformation Systems, Inc.

43353-B Osgood Rd. Fremont, 94539

www.etslan.com

800-752-8208 510-656-2012 Fax 510-656-2026

