


PV990 Series

HD SDI Splitter

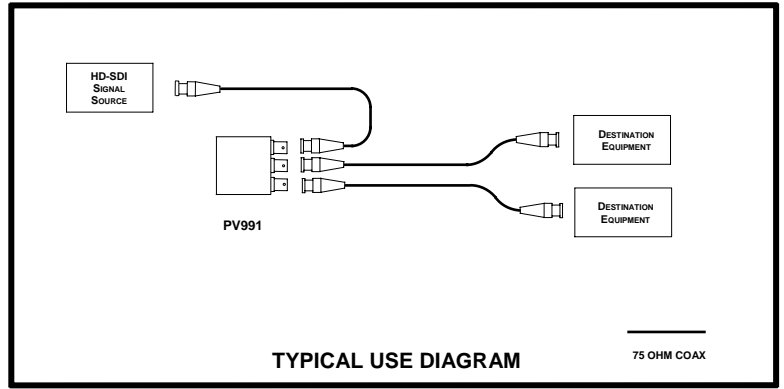

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> Enables two outputs from a single source without interference or impedance-mismatch. Passive device with superior reliability and simplicity: no power required. Individual splitter or in rack-mount panel up to 16 units across. Expandable according to production studio requirements. Sturdy compact metal case. 100% tested and USA-made. 	<p>The ETS PV990 Series HD-SDI Splitter is a passive, versatile and easy-to-use video splitter designed for both studios and on-location productions, as well as live performance venues. The HD-SDI Splitter can be used for monitoring in a wide variety of installations and locations.</p> <p>The PV991 HD-SDI Splitter is designed to split a SMPTE 292M video signal into two full-quality broadcast video signals and send them over RG59 coax up to 450 feet. The two FBNCs can passively split the signal and send the HD-SDI video signal out the FBNC to video monitors or other digital devices up to 450 feet.* (*based on Belden® cable).</p> <p>NOTE: For recommended cable lengths consult the distance table: [*based on Belden® cable insert link]</p>	<ul style="list-style-type: none"> HD broadcast installations High-definition video studio and field productions HD Production units/OB vans Multiple displays Live-action stage monitoring Monitoring from remote trailer or control room

Specifications	Product Ordering Information
<p>Data Rate: Up to 1.485 Gb/s</p> <p>Connectors: (3) 75 ohm FBNC</p> <p>Impedance: 75 ohm</p> <p>Insertion Loss: < 1 dB (NOTE: reduces signal level by 3 dB (loss <4dB))</p> <p>Return Loss: Minimum -20dB to 2 Ghz.</p> <p>Dimensions: 63 mm x 55 mm x 26 mm</p> <p>Net Weight: 0.1 Kg</p>	<p>PV991 Splitter (1) FBNC to (2) FBNC. One input, two outputs.</p> <p>22827 19" Panel, 2 RU - Accomodates up to 16 splitters</p>

© Copyright 2011 Energy Transformation Systems, Inc. FatCat5 System™ panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon™ Color Coding System, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and used to identify the products or services of, their respective owners. Revised 10/27/2011



Energy Transformation Systems, Inc.
 43353 B Osgood Road, Fremont, CA 94539
 www.etslan.com
 800-752-8208 510-656-2012 Fax 510-656-2026

