
ES-101 Pair Splitter



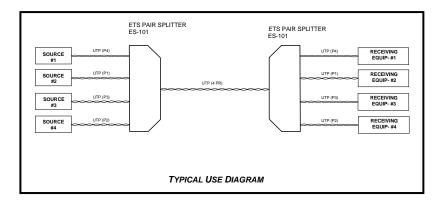

Features/Advantages	Description	Applications
 Split/combine one RJ45 jack into four RJ45 jacks Snap-on icon for easy port identification Rugged, compact plastic case Passive device Lifetime Warranty USA-Made 100% tested 	On occasion, it is desirable for several signals to share a single connecting cable. The ETS Pair Splitter (ES-101) can be placed at one end of the connecting cable where the Pair Splitter/Combiner places each of the four pairs of Cat3 or better cable onto a common jack. At the other end of the cable run, the second Pair Splitter breaks out each pair to its own individual jack. The Pair Splitter is a convenient tool for installers to carry in their tool boxes, as it can split or combine two or more signals on Cat3 or better cable, thus saving time for pulling extra cables.	 Split/Combine Audio/Video Signals Split/Combine Signals for Security Systems

Specifications			Product Ordering Information	
Connectors	RJ45 jack to (4) RJ45 jacks	ES-101	Pair Splitter to RJ45 jack to RJ45 jack Port #1 RJ45 jack, pins 5, 4 to RJ45 jack, pins 1, 2 Port #2 RJ45 jack, pins 5, 4 to RJ45 jack, pins 3, 6 Port #3 RJ45 jack, pins 5, 4 to RJ45 jack, pins 5, 4 Port #4 RJ45 jack, pins 5, 4 to RJ45 jack, pins 7, 8	
Dimensions (HLW)	87mm x 46mm x 26mm			
Net Weight	0.03 kg			

© Copyright 2006-2011 Energy Transformation Systems, Inc.

FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, *Cine*Snake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.

Revised 10/16/2011



Energy Transformation Systems, Inc. 43353 B Osgood Rd., Fremont, CA 94539 www.etslan.com 800-752-8208 510-656-2012 Fax 510-656-2026

